



Horn Antenna Datasheet



Maritime



Aerospace



Ground




3310 Carlins Park Drive
Baltimore, MD 21215 USA

(410)-542-1700
www.Meggitt-Baltimore.com

Standard Gain Horn Antenna

The Parker Meggitt WR-102 standard gain antenna operates from 7 to 11 GHz with a nominal gain of 10 dBiL. The antenna has a WR-102 waveguide input in accordance with a UG-1493/U flange. The antenna is available in either aluminum or titanium. The antenna has a 3 dB E-Plane beamwidth of 60° at 7 GHz decreasing to 42° at 11 GHz and an H-Plane beamwidth of 72° at 7 GHz decreasing to 47° at 11 GHz. Peak gain is 7.9 dBiL at 7 GHz increasing to 12.5 dBiL at 11 GHz. Parker Meggitt specializes in custom design antennas. If any of the specifications listed don't meet your requirements, let us know and we can provide a unique solution for your application.

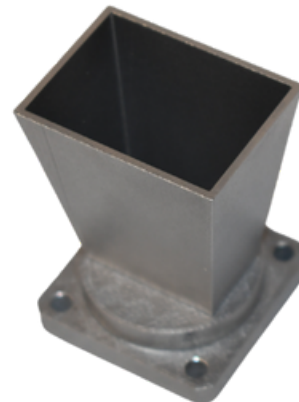

Key Features and Specifications:

Light Weight	High Efficiency
High Power Handling Capability	Aluminum or Titanium Material Available

Frequency	7 - 11 GHz
VSWR	< 1.5:1
Nominal Gain	10 dBiL
Polarization	Linear
RF Power ¹	0.48 MegaWatts
Weight (lbs.)	0.15 lb (Aluminum), 0.25 lb (Titanium)
Size (Inches)	2.4 x 1.75 x 1.3 (External Aperture Size)
Input	WR-102 Waveguide
Environment	MIL-STD-810

[1] Theoretical value at 1 atmosphere dry air at 20°C, no safety factor included